




TYPE 12A2

Description

- Dish-Diamond or CBN in Rim

- D** Wheel Diameter
- T** Wheel Thickness
- H** Hole Diameter as required*
- W** Rim Width
- E** Back Thickness
- K** Inside Flat Diameter
- B** Dish Angle
- X** Diamond Depth

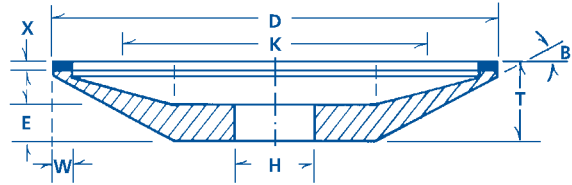


ASA can supply 12A2 wheels up to 36" in diameter in any thickness.

TYPE 12V4

Description

- Dish-Rim Beveled Inside Diamond or CBN

- D** Wheel Diameter
- T** Wheel Thickness
- H** Hole Diameter as required*
- W** Rim Width
- E** Back Thickness
- K** Inside Flat Diameter
- B** Dish Angle
- V** Rim Angle
- X** Diamond Depth

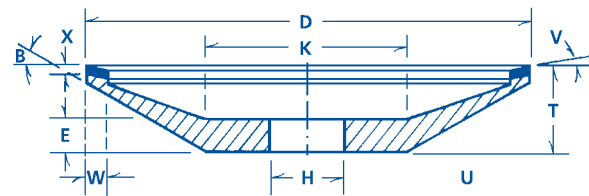


ASA can supply 12V4 wheels up to 36" in diameter in any thickness.

TYPE 12V9

Description

- Diamond-Dish or CBN in Periphery
- Please specify angle from outside diameter

- D** Wheel Diameter
- T** Wheel Thickness
- H** Hole Diameter as required*
- U** Length of Insert
- E** Back Thickness
- B** Approximate Back Angle
- K** Inside Flat Diameter
- X** Diamond Depth

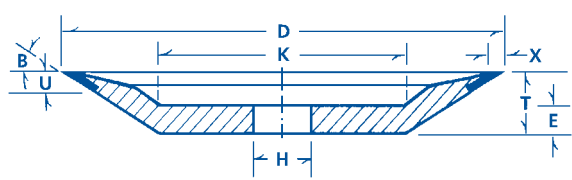

ASA can supply 12V9 wheels up to 20" in diameter in any thickness.

All diamond and CBN wheels are available in any fraction, decimal, and metric size.

Please call or fax ASA about your individual requirements • Phone: (330) 673-7333 • Fax: (800) 725-5541 / (330) 673-9414