




TYPE 1EE1

Description

- Straight "EE" Face-Diamond or CBN in Periphery
- Available in 75 and 100 concentration only
- 1/4" depth "X" also available

D Wheel Diameter
T Wheel Thickness
H Hole Diameter as required*
V Included Angle
X Diamond Depth

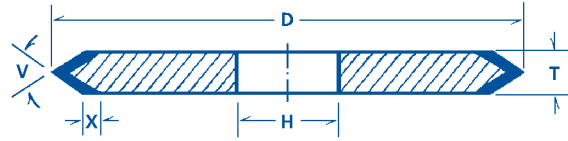

Special Notes:

- Special included angles "V" available upon request


ASA can supply 1EE1 wheels up to 20" in diameter in any thickness.

TYPE 1FF1

Description

- Straight "FF" Face-Diamond or CBN in Periphery.
- Standard radius is one-half the thickness unless otherwise specified.

D Wheel Diameter
T Wheel Thickness
H Hole Diameter as required*
R Radius on Face
X Diamond Depth

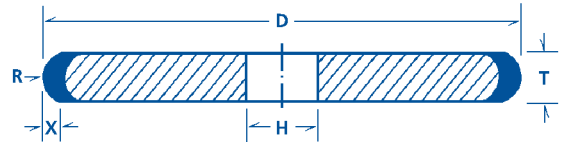

Special Notes:

- Special radius available upon request


ASA can supply 1FF1 wheels up to 20" in diameter in any thickness.

TYPE 1V1

Description

- Straight "V" Face-Diamond or CBN in Periphery
- Please specify angle from outside diameter.
- Wheels used for:
 - Gashing •Relieving •Fluting

D Wheel Diameter
T Wheel Thickness
H Hole Diameter as required*
V Face Angle
X Diamond Depth

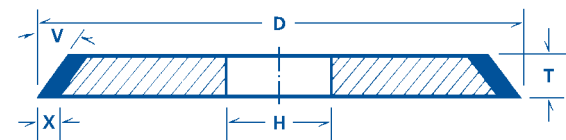

Special Notes:

- Any angle available upon request

ASA can supply 1V1 wheels up to 30" in diameter in any thickness.

All diamond and CBN wheels are available in any fraction, decimal, and metric size.

Please call or fax ASA about your individual requirements • Phone: (330) 673-7333 • Fax: (800) 725-5541 / (330) 673-9414