




TYPE 2A2T

Description

- Cylinder-Threaded Mounting Holes-Diamond or CBN in Rim
- Face style wheels available for Blanchard, and other grinders
- Specify bolt circle and hole size

D Wheel Diameter
T Wheel Thickness
W Rim Width
X Diamond Depth

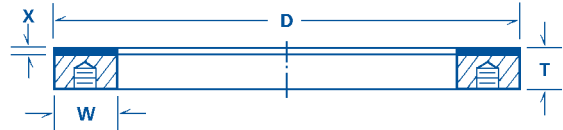


ASA can supply 2A2T wheels up to 36" in diameter in any thickness.

TYPE 3A1

Description

- Straight-Diamond or CBN in Periphery
- Specify hole diameter when ordering
- Any diamond thickness ("U" dimension), including decimals, are available
- 3V1 angle wheel also available

D Wheel Diameter
T Wheel Thickness
H Hole Diameter as required
X Diamond Depth
U Diamond Thickness

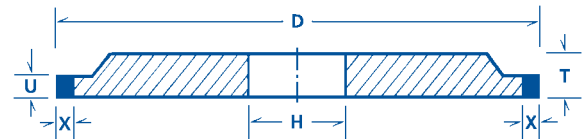


ASA can supply 3A1 wheels up to 36" in diameter in any thickness.

TYPE 4A2P

Description

- Dish-Diamond or CBN in Periphery
- Dish wheel for facing operations
- Alterations to fit Widma, Vollmer and Akemat machines quoted upon request

D Wheel Diameter
T Wheel Thickness
H Hole Diameter as required*
J Back Flat Diameter
W Rim Width
E Back Thickness
X Diamond Depth
Z Preform Thickness at Rim

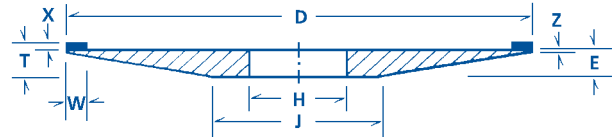

ASA can supply 4A2P wheels up to 36" in diameter in any thickness.

All diamond and CBN wheels are available in any fraction, decimal, and metric size.

Please call or fax ASA about your individual requirements • Phone: (330) 673-7333 • Fax: (800) 725-5541 / (330) 673-9414