




TYPE 11A2

Description

- Flaring Cup-Diamond or CBN in Rim
- Additional diameters and rim width available upon request

- D** Wheel Diameter
- T** Wheel Thickness
- H** Hole Diameter as required*
- W** Rim Width
- E** Back Thickness
- K** Inside Flat Diameter
- X** Diamond Depth

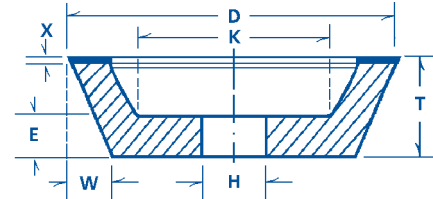


ASA can supply 11A2 wheels up to 36" in diameter in any thickness.

TYPE 11V4

Description

- Flaring Cup-Rim Beveled Inside Diamond or CBN in Rim

- D** Wheel Diameter
- T** Wheel Thickness
- H** Hole Diameter as required*
- W** Rim Width
- E** Back Thickness
- K** Inside Flat Diameter
- V** Rim Angle
- X** Diamond Depth

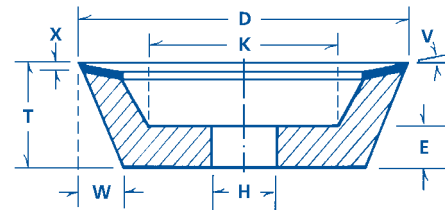


ASA can supply 11V4 wheels up to 36" in diameter in any thickness.

TYPE 11V9

Description

- Flaring Cup-Diamond or CBN in Periphery

- D** Wheel Diameter
- T** Wheel Thickness
- H** Hole Diameter as required*
- E** Back Thickness
- K** Inside Flat Diameter
- B** Approximate Back Angle
- U** Insert Length
- X** Diamond Depth

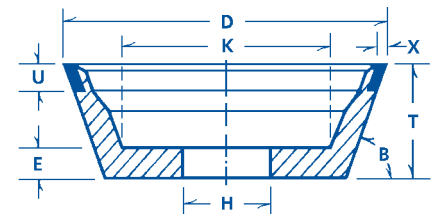

Special Notes:

- 20MM arbor hole for Deckel grinders available upon request

ASA can supply 11V9 wheels up to 8" in diameter in any thickness.

All diamond and CBN wheels are available in any fraction, decimal, and metric size.

Please call or fax ASA about your individual requirements • Phone: (330) 673-7333 • Fax: (800) 725-5541 / (330) 673-9414